

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

TPS 31352

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application

Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for invention entitled:

A PROCESS FOR THE MANUFACTURING OF SURFACE ELEMENTS WITH A STRUCTURED UPPER SURFACE

and invented by:

Krister HANSSON; Johan LUNDGREN; and Hakan WERNERSSON

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 24 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
TPP 31352

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)

a. ☒ Formal Number of Sheets 1 (Fig. 1)

b. ☐ Informal Number of Sheets _____

4. ☐ Oath or Declaration

a. ☐ Newly executed (original or copy) ☐ Unexecuted

b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)

c. ☐ With Power of Attorney ☐ Without Power of Attorney

d. ☐ DELETION OF INVENTOR(S)

Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (usable if Box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Computer Program in Microfiche (Appendix)

7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)

a. ☐ Paper Copy

b. ☐ Computer Readable Copy (identical to computer copy)

c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations

12. ☒ Preliminary Amendment

13. ☒ Acknowledgment postcard

14. ☐ Certificate of Mailing

☐ First Class ☐ Express Mail (Specify Label No.): _____

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
TPP 31352

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☒ Additional Enclosures *(please identify below):*

Claim for Convention Priority

Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)

17. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

Warning

An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
TPP 31352

Total Pages in this Submission

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	18	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	1	- 3 =	0	x \$80.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
OTHER FEE (specify purpose) _____					\$0.00
TOTAL FILING FEE					\$710.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
 - ☐ Credit any overpayment.
 - ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).



Signature

Dated: November 24, 2000

Thomas P. Pavelko, Esquire
Registration No. 31,689
STEVENS, DAVIS, MILLER & MOSHER, L.L.P.
1615 L Street, N.W., Suite 850
Washington, D.C. 20036
Telephone: (202) 785-0100
Facsimile: (202) 408-5200 or (202) 408-5088

CC:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Krister HANSSON

Attn: Applications

Serial No.: To be assigned

Filed: November 24, 2000

For: A PROCESS FOR THE MANUFACTURING OF SURFACE ELEMENTS WITH A
STRUCTURED UPPER SURFACE

PRELIMINARY AMENDMENT

Honorable Commissioner of
Patents and Trademarks
Washington, D.C. 20231

Dear Sir:

Prior to an examination on the merits and calculation of the filing fee, please amend the above-identified application as follows:

IN THE TITLE OF THE INVENTION

Please delete the “.” after “surface”.

IN THE SPECIFICATION

After the title and prior to the first line of the invention, please insert the following headings:

--BACKGROUND OF THE INVENTION--

1. **Field of the Invention--**.

Page 1, between the first and second paragraphs, please insert the following heading:

--DESCRIPTION OF THE RELATED ART--.

Page 2, between lines 2 and 3, please insert the following heading:

--SUMMARY OF THE INVENTION--

Page 6, between lines 19 and 20, please insert the following heading:

--DETAILED DESCRIPTION OF THE INVENTION--.

Page 10, between lines 27 and 28, please insert the following heading:

--BRIEF DESCRIPTION OF THE DRAWINGS--.

IN THE CLAIMS

Claim 2, line 1, change "characterised" to read --characterized--.

Claim 3, line 1, delete "or 2" and change "characterised" to read --characterized--.

Claim 4, line 1, change "any of the claims 1 - 3, characterised" to read --claim 1, characterized--.

Claim 5, line 1, change "characterised" to read --characterized--.

Claim 6, line 1, change "characterised" to read --characterized--.

Claim 7, line 1, change "characterised" to read --characterized--.

Claim 8, line 1, change "characterised" to read --characterized--.

Claim 9, line 1, change "characterised" to read --characterized--.

Claim 10, line 1, delete "or 9" and change "characterised" to read --characterized--.

Claim 11, line 1, delete "or 9" change "characterised" to read --characterized--.

Claim 12, line 1, change "characterised" to read --characterized--.

Claim 13, line 1, change "characterised" to read --characterized--.

Claim 14, line 1, delete "or 9" and change "characterised" to read --characterized--.

Claim 15, line 1, change "characterised" to read --characterized--.

Claim 16, line 1, delete "or 11" and change "characterised" to read --characterized--.

Claim 17, line 1, change "characterised" to read --characterized--.

Claim 18, line 1, change "characterised" to read --characterized--.


IN THE ABSTRACT

Please change "ABSTRACTS:" to read --Abstract--.

REMARKS

The purpose of the foregoing amendment is to insert headings and to delete multiple dependent claims, thereby minimizing the filing fee and placing the application in proper form for examination under U.S. practice. No new matter is entered.

Respectfully submitted,



Thomas P. Pavelko

Registration No. 31,689

TPP/mat

Attorney Docket No.: TPP 31352

STEVENS, DAVIS, MILLER & MOSHER, L.L.P.

1615 L Street, N.W., Suite 850

Washington, D.C. 20036

Telephone: (202) 785-0100

Facsimile: (202) 408-5200 or (202) 408-5088

Date: November 24, 2000

A process for the manufacturing of surface elements with a structured upper surface.

The present invention relates to a process for the manufacture of decorative surface elements with a surface structure matching the decor of the upper surface.

Products coated with simulated versions of materials such as wood and marble are frequent today. They are foremost used where a less expensive material is desired, but also where resistance towards abrasion, indentation and different chemicals and moisture is required. As an example of such products floors, floor beadings, table tops, work tops and wall panels can be mentioned.

As an example of an existing product can be mentioned the thermosetting laminate which mostly consists of a number of base sheets with a decor sheet placed closest to the surface. The decor sheet can be provided with a desired decor or pattern. Frequently used patterns usually represent the image of different kinds of wood or minerals such as marble or granite. The surface of the laminate can, at the laminating procedure, be provided with a structure, which will make the decor more realistic. Press plates with structure or structure foils are here frequently used during the pressing of the laminate. A negative reproduction of the structure in the press plate or the foil will be embossed into the laminate surface during the laminating procedure.

The structure suitably represents features characteristic for the pattern the decor represents. The structure can be made coarse to simulate for example rough planed stone, or smooth with randomly placed pits and micro cracks to simulate polished marble. When the surface of wood is simulated the surface is provided with randomly placed thin oblong indentations which imitate pores.

It has for a long time been a great need to be able to manufacture simulated materials where a lacquer is used as a top coat on a decor. The only way, so far, to

achieve a surface structure in lacquer is casting or abrasive moulding which both are time consuming and expensive processes.

The invention relates to a process for the manufacturing of a decorative surface element. The element comprises a base layer, a decor and a wear layer of a UV or electron beam curing lacquer.

The design of the décor can be achieved by utilising the process steps below;

- i) A segmentation pattern is selected, the segmentation comprising at least two décor segments on each surface element. The shape, as seen from above, of the surface element is hereby selected from the group; triangular, quadratic, rectangular, heptagonal, pentagonal and octagonal while the shape of the segments is selected from the group triangular, quadratic, rectangular, heptagonal, pentagonal, octagonal, circular, elliptical, perturbed and irregular.
- ii) A segment décor is then selected for each segment. The segment décor is selected from the group; digitised and simulated depiction of different kinds of wood, minerals and stone, different kinds of fabric, art work and fantasy based décor.
- iii) Each selection is made on a terminal where the selections emanates from a data base and that the selection is visualised via the terminal.

The décor is preferably achieved by digitisation of an actual archetype or by partly or completely being created in a digital media. The digitised décor is preferably stored digitally in order to be used as a control function and original, together with control programs and selection parameters, when printing the décor.

The dimensions of the surface to be covered by surface elements is suitably entered into the terminal and support programs calculates an installation pattern. The installation pattern calculation is suitably also used for printing an assembly instruction. In order to visualise the selection the installation pattern calculation is possibly used for printing a miniaturised copy of the calculated installation with the selected pattern and décor. The dimensions of the surface to be covered by surface elements is suitably entered into the terminal and that that support programs further calculates décor and segmentation pattern matching between the surface elements.

comprising at least two décor segments on each surface element. The shape, as seen from above, of the surface element is preferably selected from the group; triangular, quadratic, rectangular, heptagonal, pentagonal and octagonal. The shape of the surface elements with surrounding décor and the shape of the surface elements which, of course, is selected so that they can be joined with each other. The shape of the segments is selected from the group triangular, quadratic, rectangular, heptagonal, pentagonal, octagonal, circular, elliptical, perturbed and irregular.

- ii) A segment décor is then selected for each segment. The segment décor is selected from the group; digitised and simulated depiction of different kinds of wood, minerals and stone, different kinds of fabric, art work and fantasy based décor.
- iii) Each selection is made on a terminal where the selections emanates from a data base. The selection is visualised via the terminal.

A décor effect in the border between the main décor and the surrounding décor is suitably selected. The selection is preferably made from the group; fading, sharp edge, sharp edge with shadow effect, jagged edge, jagged edge with shadow and surrounding inlay of other décor. Also this selection is made on the terminal.

The dimensions of the surface to be covered by surface elements is suitably entered into the terminal and support programs calculates an installation pattern. The installation pattern calculation is preferably used for printing an assembly instruction. The installation pattern calculation is according to one embodiment of the invention used for printing a miniaturised copy of the calculated installation with the selected pattern and décor. This print out may serve as an evaluation copy of the design before making decisions regarding the manufacturing.

The dimensions of the surface to be covered by surface elements is entered into the terminal. Support programs further calculates décor and segmentation pattern matching between the surface elements. The selections is preferably used, together with support programs for controlling further steps in the manufacturing procedure selected from the group; identification marking, positioning marking, packaging,

lacquering, surface embossing, storing and delivery logistics. An algorithm is preferably used for guiding the positioning of the décor segments and segmentation pattern so that a décor segment from one surface element may continue on an adjoining surface element. The control program is then preferably used together with décor data and selection parameters for applying matching identification on the surface elements.

The surface elements may be used as floor, wall or ceiling boards. The surface elements are suitably manufactured through the following process;

- i) A supporting core with a desired format is manufactured and provided with an upper side and a lower side.
- ii) The upper side of the supporting core is then provided with a décor, by for example printing. The décor is positioned after a predetermined fixing point on the supporting core.
- iii) The upper side of the supporting core is then provided with a protecting, at least partly translucent, wear layer by for example spray coating, roller coating, curtain coating and immersion coating or by being provided with one or more sheets of α -cellulose impregnated with thermosetting resin or lacquer.

The décor is suitably achieved by digitisation of an actual archetype or by partly or completely being created in a digital media. The digitised décor is stored digitally in order to be used as a control function and original, together with possible control programs, when printing the décor.

The décor may accordingly be obtained by making a high resolution or selected resolution digital picture of the desired décor. This is suitably made by means of a digital camera or scanner. The most common décor will of course be different kinds of wood and minerals like marble, as these probably will continue to be preferred surface decoration in home and public environments. It is, however, possible to depict anything that is visible. The digitised version of the décor is then edited to fit the size of the supporting core. It is also possible to rearrange the décor in many different ways, like changing colour tones, contrast, dividing the décor into smaller segments and adding other decorative elements. It is also

possible to completely create the décor in a computer equipped for graphic design. It is possible to create a simulated décor so realistic that even a professional will have great problems in visually separating it from genuine material. This makes it possible to make for example floor boards with an almost perfect illusion of a rare kind of wood, like ebony or rose wood and still preserving trees under threat of extermination.

The digital décor is used together with guiding programs to control a printer. The printer may be of an electrostatic type or an inc-jet type printer. The resolution needed is much depending on the décor that is to be simulated, but resolutions of 10 - 1500 dots per inch (dpi) is the practical range in which most décor will be printed. Under normal conditions a resolution of 300 - 800 dpi is sufficient when creating simulations of even very complex decorative patterns and still achieve a result that visually is very difficult to separate from the archetype without close and thorough inspection.

The digitally stored décor can also be used together with support programs when guiding other operations and procedures in the manufacturing process. Such steps in the operation may include procedures like identification marking, packaging, lacquering, surface embossing, storing and delivery logistics as well as assembly instructions.

It is advantageous to manufacture the supporting core in the desired end user format and to provide it with edges suited for joining before applying the décor and wear layer, since the amount of waste thereby is radically reduced. The décor matching tolerances will also be improved further by this procedure.

The main part of the supporting core is suitably constituted by a particle board or a fibre board. It is, however, possible to manufacture the core that at least partly consist of a polymer such as for example polyurethane or a polyolefin such as polyethylene, polypropylene or polybutene. A polymer based core can be achieved by being injection moulded or press moulded and can be given its shape by plastic moulding and does therefore not require any abrasive treatment. A polymer based core may except polymer also contain a filler in the form of a

particle or fibre of organic or inorganic material, which besides the use a cost reducing material also will be used to modify the mechanical characteristics of the core. As an example of such suitable fillers can be mentioned; cellulose or wood particles, straw, starch, glass, lime, talcum, stone powder and sand. The mechanical characteristics that may be changed is for example viscosity, thermal coefficient of expansion, elasticity, density, fire resistance, moisture absorption capacity, acoustic properties, thermal conductivity, flexural and shearing strength as well as softening temperature.

The upper surface, i.e. the surface that is to be provided with décor, is suitably surface treated before the printing. Such surface treatment will then incorporate at least one of the steps, ground coating and sanding. It is also possible to provide the surface with a structure that matches the décor that is to be applied.

The translucent wear layer is suitably constituted by a UV- or electron beam curing lacquer such as an acrylic, epoxy, or maleimide lacquer. The wear layer is suitably applied in several steps with intermediate curing where the last one is a complete curing while the earlier ones are only partial. It will hereby be possible to achieve thick and plane layers. The wear layer suitably includes hard particles with an average particle size in the range 50 nm - 150 μ m. Larger particles, in the range 10 μ m - 150 μ m, preferably in the range 30 μ m - 150 μ m, is foremost used to achieve abrasion resistance while the smaller particles, in the range 50 nm - 30 μ m, preferably 50 nm - 10 μ m is used for achieving scratch resistance. The smaller particles is hereby used closest to the surface while the larger ones are distributed in the wear layer. The hard particles are suitably constituted of silicon carbide, silicon oxide, α -aluminium oxide and the like. The abrasion resistance is hereby increased substantially. Particles in the range 30 mm - 150 mm can for example be sprinkled on still wet lacquer so that they at, least partly, becomes embedded in finished wear layer. It is therefore suitable to apply the wear layer in several steps with intermediate sprinkling stations where particles are added to the surface. The wear layer can hereafter be cured. It is also possible to mix smaller particles, normally particle sizes under 30 μ m with a standard lacquer. Larger particles may be added if a gelling agent or the like is present. A lacquer with smaller particles is suitably used as top layer coatings, closer to the upper surface.

The scratch resistance can be improved by sprinkling very small particles in the range 50 nm - 1000 nm on the uppermost layer of lacquer. Also these, so called nano-particles, can be mixed with lacquer, which with is applied in a thin layer with a high particle content. These nano-particles may besides silicon carbide, silicon oxide and α -aluminium oxide also be constituted of diamond.

The décor on the surface elements is suitably constituted by a number of décor segments with intermediate borders, which borders, on at least two opposite edges coincides with intended, adjacent surface elements.

Thus, the invention relates to a process for providing the decorative surface elements with a surface structure that in all essential aspects matches the décor. The decorative surface element also comprises a base layer and a decorative upper surface. The invention is characterised in that;

- i) A wetting repellent lacquer is printed in a predetermined pattern on the decorative upper surface, the wetting repellent lacquer covering only parts of the decorative upper surface.
- ii) A wear layer of a UV or electron beam curing lacquer is then applied on top of the decorative upper surface. The UV or electron beam curing lacquer is repelled from the parts of the surface being covered by the wetting repellent lacquer whereby a surface structure is achieved.

The UV or electron beam curing lacquer preferably consists of an acrylic, epoxy or a maleimide lacquer. The wear layer is preferably applied in several steps with intermediate partial curing. The wear layer preferably also includes hard particles with an average particle size in the range 50nm - 150 μ m in order to increase the wear resistance. These hard particles suitably consists of for example silicon oxide, α -aluminium oxide or silicon carbide. According to an alternative embodiment of the invention the main part of the hard particles may consists of the silicon oxide, α -aluminium oxide or silicon carbide while a smaller amount of the hard particles consist of diamond. The hard particles consisting of diamond is then in the average particle size range 50nm - 2 μ m and is placed close to the upper surface of the wear layer.

The wetting repellent lacquer is preferably also constituted of a UV or electron beam curing lacquer and with a content of silicone polymer. It is suitable to use a wetting repellent lacquer which also comprises UV or electron beam curing acrylic, epoxy or a maleimide lacquer and thereby is chemically compatible with the wear layer. The wetting repellent lacquer is suitably translucent or semi-translucent.

It is possible to enhance the structuring by adding pigmentation in the wetting repellent lacquer which will create a shadow effect in the structure. According to an alternative the wetting repellent lacquer includes a matting agent which also creates a structure enhancing effect in the structure. It is of course possible to combine the two methods. The wetting repellent lacquer is suitably cured before the step where the wear layer is applied.

As described earlier, the decorative upper surface comprises a decor layer, which decor layer originates from a digitally stored original. The digitally stored original is preferably processed in order to achieve a digital structure original whereby a surface structure that in every essential aspect matches the decor is achieved. The wetting repellent lacquer is then suitably applied by means of an ink-jet printer which may be controlled by a computer.

The base layer suitably consists of a particle board or a fibre board but may also mainly consist of a polymer such as polyurethane.

It is according to the present invention possible to achieve matching structure on even particularly characteristic décor segments such as borderlines between simulated slabs, bars, blocks or the like and also knots, cracks, flaws and grain which is visually simulated in the décor. The structure may be stored as digital data. Said data may be used for guiding automated printers when providing said characteristic décor segments with a suitable surface structure. Said printing process is synchronised via the predetermined fixing point on the surface element.

The process described in the present application, for manufacturing surface elements is very advantageous from a logistic point of view since the number of steps when achieving a new décor is radically reduced. It is, according to the present invention possible to use digitally created or stored data for directly printing the décor on a surface element by using a ink-jet printer or a photo-static printer. The so-called set up time will thereby be very short, whereby even very special customer requirements may be met at a reasonable cost. It is according to the present invention possible to manufacture, for example, a world map with matching surface structure in very large format, stretching over a great number of surface elements without any disrupting deviations in décor and structure matching, to mainly the same cost as bulk produced surface elements. Since the décor and surface structure may be handled digitally all the way to the point of being applied to the surface of the core, set up times will be practically non-existent while at the same time a high degree of automation will be practicable. It is also possible to automatically provide the surface elements with identification and orientation marking which would make the installation of complex décor, like world maps in the example above, much easier. This has so far been impossible.

Surface elements manufactured as described above is suitably used as a floor covering material where the demands on stability and scratch and abrasion resistance is great. It is, according to the present invention, also possible to use the surface elements as wall and ceiling decorative material. It will however not be necessary to apply thick wear layer coatings in the latter cases as direct abrasion seldom occurs on such surfaces.


The invention is described further in connection to an enclosed figure, embodiment examples and schematic process descriptions showing different embodiments of the invention.

Accordingly, the figure shows parts of a surface element 1 which includes an upper decorative layer 2, edges 3 intended for joining, a lower side 4 and a supporting core 5. The process is initiated by manufacturing a supporting core 5

The décor side of the surface element 1 is provided with a surface structure 2''' which enhances the realism of the décor 2'. It is possible to simulate the surface structure of, for example, wood block chevron pattern décor.

The décor side of the surface element 1 is provided with a surface structure 2''' which enhances the realism of the décor 2'. It is possible to simulate the surface structure of, for example, wood block chevron pattern décor.

Process scheme 1.

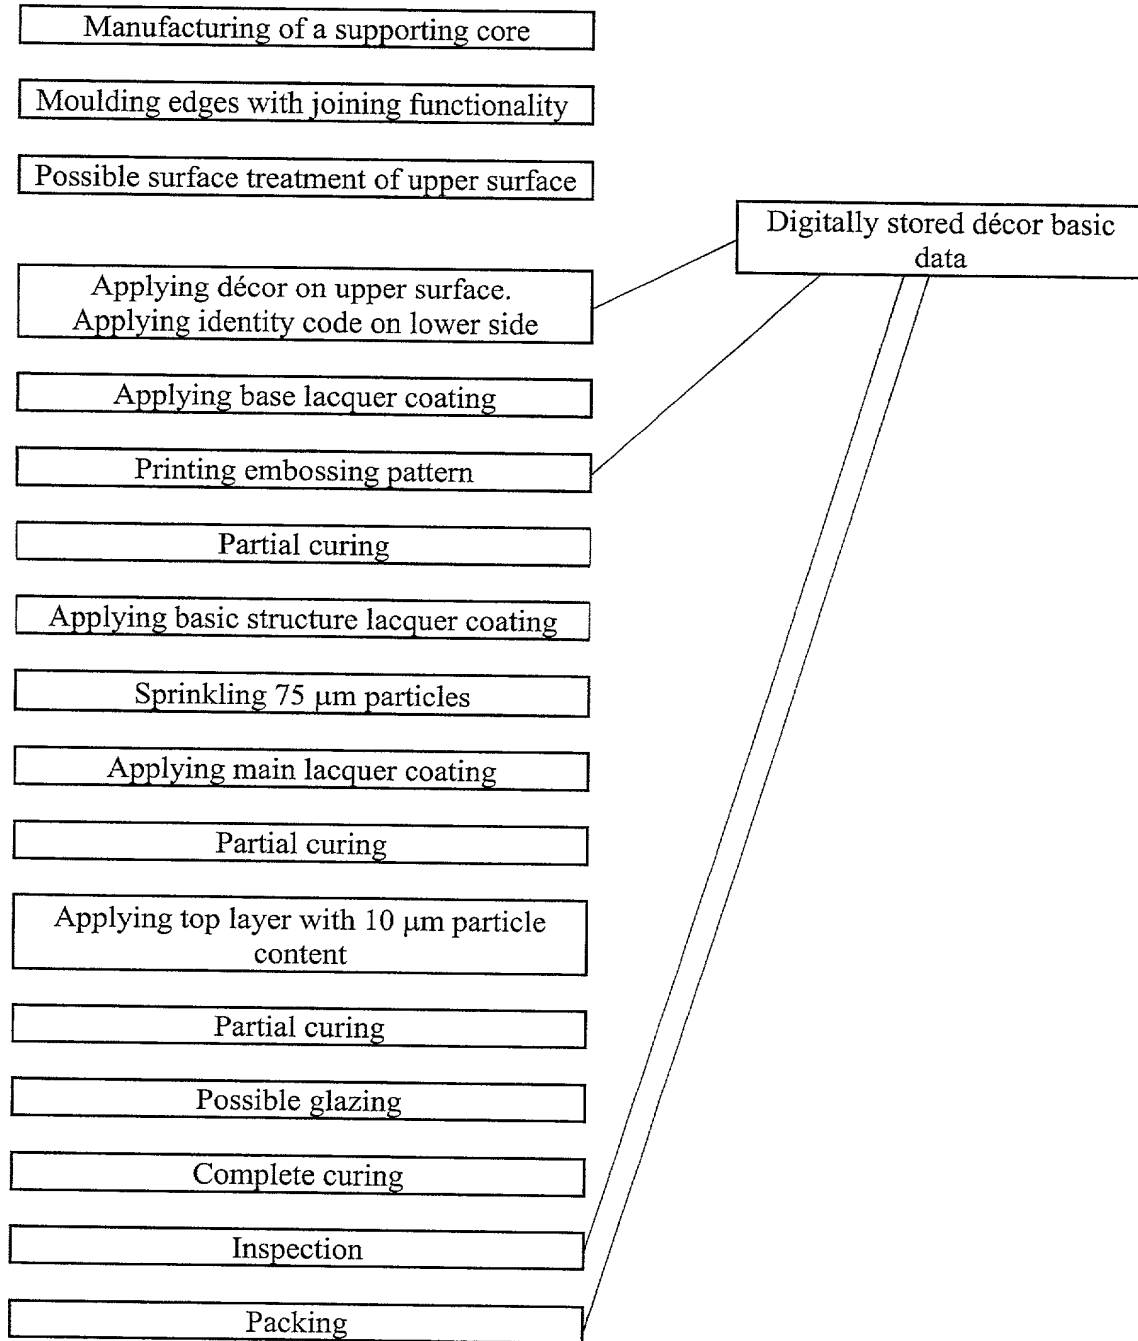

A supporting polymer and filler based core is manufactured in the desired format and is provided with an upper side, a lower side and edges provided with joining members, such as tongue and groove. The upper side of the supporting core is then sanded smooth after which a primer is applied. A décor is then applied on the

upper side by means of a digital photo-static five colour printer. The colours are magenta, yellow, cyan, white and black. The décor is positioned from a predetermined fixing point in form of a corner of the supporting core, while the décor direction is aligned with the long side edge initiating from the same corner.

The basis for the décor is stored as digital data. This digital data has been achieved by digitising a number of wood grain patterns with a digital camera. A number of rectangular blocks with a fixed width, but of varying length is selected and parted from the digital wood grain pictures. The width of the rectangular blocks is selected so that three block widths equals the width of a supporting core. The digital image of the wood blocks are then classified after wood grain pattern and colour so that a number of groups is achieved. The groups are; fair wood with even grain, dark wood with even grain, fair wood with knots and flaws, dark wood with knots and flaws, fair cross-grained wood and finally dark cross-grained wood. Each group contains five different block simulations. An algorithm is feed into a computer which is used for the guiding of the printing operation so that the simulated wood blocks is digitally placed in three longitudinal rows and mixed so that two similar wood blocks never is placed next to each other. The algorithm will also guide the position of the latitudinal borderlines between the simulated wood blocks so that they are unaligned with more than one block width between adjacent rows. It will also guide the latitudinal position of the borderlines so that it either aligns with the shorter edges of the supporting core or is unaligned with more than one block width. Another printer, also guided by the computer, is utilised for printing a running matching number on the lower side short side edges. The décor will hereby continue longitudinally over the surface elements and a perfect matching is obtained when the surface elements are placed in numerical order.

A basic layer of UV-curing acrylic lacquer is then applied by means of a rollers. The basic layer is then cured to the desired viscosity. The surface structuring is then initiated by printing the part of the structure that is to form recesses in the finished surface. A UV-curing acrylic wetting repellent lacquer with a content of silicone polymer is printed by means of an ink-jet printer in the desired pattern. The pattern is made up by narrow lines of varying length and will cover less than

5% of the total surface of the surface element. The ink-jet printer is controlled by a computer where the digital décor used earlier is processed to receive a digital structure matching the décor in aspects like grain direction and density, flaws, knots and border lines between simulated wood blocks. This processing may be achieved by an automatic process where an algorithm is used as a digital filter or by manual operation during the scanning procedure. By this procedure a surface structure matching all essential aspects of the décor is achieved.

A second basic layer of UV-curing acrylic lacquer is then applied by means of a rollers. The lacquer will be repelled from the parts of the surface where the wetting repellent lacquer is present resulting in recesses in the surface. Particles with an average particle size in the range 75 μm is then sprinkled onto the still wet second basic layer, whereby the main layer of UV-curing acrylic lacquer is applied by roller coating. The lacquer is then cured using UV-light whereby the viscosity of the lacquer increases. A top layer of UV-curing acrylic lacquer with an additive in the form of hard particles with an average size of 10 μm , is then applied by means of a roller. The lacquer is then cured with UV-light so that the viscosity increases. It may, in some cases, be advantageous to perform a glazing operation on the top surface in order to make the edges between the main upper surface and the recesses more well defined. This is suitably achieved by pressing a heated roller towards the surface. The surface temperature of the roller is then suitably between 40 and 150°C.

The lacquer is then, if not already completely cured at a prior stage in the process, completely cured with UV-light to desired strength. The finished surface elements may then be inspected by the naked eye or by a digital camera supported by a computer. The surface elements are then packed in batches which are provided with identification markings.

The process above will make it possible to have a completely customer driven manufacturing where even very small quantities may be produced with the same efficiency as bulk manufacturing. Even though only one décor is described in connection to the process scheme above, it becomes clear to anyone skilled in the art, that a décor is changed very easily in the process. All of the important steps of the manufacturing such as printing, structuring, inspection, packaging and

identification marking may be controlled and supervised by central processing data. This will make it logistically possible to manufacture customer designed décor. Such a process is exemplified as follows;


The customer utilises a database via Internet or at a local dealer. It is also possible for another operator utilise a database. The database contains samples and/or reduced resolution copies of a great variety of standard décor which can be combined after predetermined parameters.

The parameters may, for example, concern a single surface element where, for example, chevron pattern, diamond pattern and block pattern may be the choices of décor segmentation. It will here be possible to select a set of different simulations to randomly or by selected parameters fill the segments, for example, marble, birch and mahogany. The customer may also add an inlay from a design of his own which is digitised and processed, preferably automatically, to a desired format and resolution.

The parameters may alternatively include décor segments that requires the space of several surface elements, for example a map over the world. The parameters may here further include fading of the larger design to a surrounding décor, surrounding frame of other décor etc.

The customers enters the measurements of the surface that is to be covered by the surface elements. The customer then makes selections from the database and is able to see his selection as a completed surface, either on screen or by printing. The visualisation program used, is suitably also used for calculating installation pattern and presenting installation instructions with identification numbers on surface elements and where to cut the elements in order to make a perfect match. The surface elements may also be provided with removable matching lines on the decorative side making matching of décor between adjacent rows easier. The customer or dealer may then confirm his order via electronic mail where the pattern and décor is reduced to a code sequence and the order can be the direct input to the computer guiding the manufacturing process as described above. The customer and/or dealer data follows the manufacturing process all the way to packaging and a fully customer guided manufacturing process is achieved.

Process scheme 2

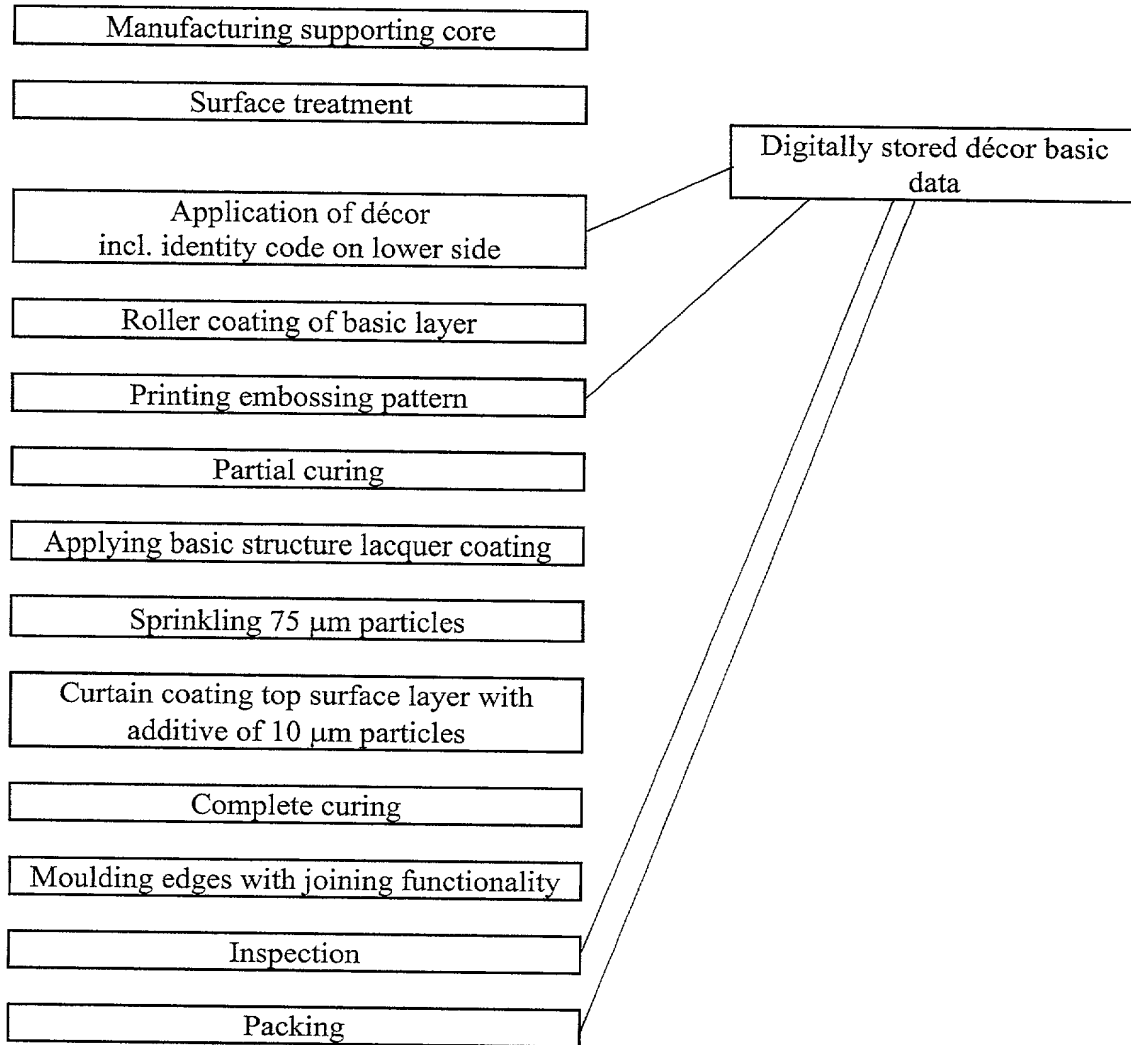

A supporting fibre board based core is manufactured in the desired format and is provided with an upper side, a lower side and edges. The upper side of the supporting core is then sanded smooth after which a white primer is applied. A décor is then applied on the upper side by means of a digital inc-jet four colour printer. The colours are magenta, yellow, cyan and black. The décor is positioned from a predetermined fixing point in form of a corner of the supporting core, while the décor direction is aligned with the long side edge initiating from the same corner.

The basis for the décor is stored as digital data. This digital data has been achieved by digitising a number of wood grain patterns with a digital camera. A

number of rectangular blocks with a fixed width, but of varying length are selected and parted from the digital wood grain pictures. The width of the rectangular blocks is selected so that three block widths equals the width of a finished surface element. The digital image of the wood blocks are then joined digitally to form a rectangular surface of a specified size, for example, 200 x 1200 mm. A selected amount of such combinations of different blocks are designed as described above so that a number of slightly different rectangular surfaces is achieved. The printer, or preferably a set of printers are positioned so that a desired number of rectangular décor surfaces with a specified intermediate distance is printed on the supporting core. The intermediate distance between the rectangular surfaces is the distance needed for parting and moulding of edges. The décor printer or printers are also used for printing fixing points at predetermined positions. Another printer, also guided by the computer, is utilised for printing an identity code on the lower side of each intended finished surface element.

A basic layer of UV-curing acrylic lacquer is then applied by means of rollers. The surface structuring is then initiated by printing the part of the structure that is to form recesses in the finished surface. A UV-curing acrylic wetting repellent lacquer with a content of silicone polymer is printed by means of an ink-jet printer in the desired pattern. The pattern is made up by narrow lines of varying length and will cover less than 5% of the total surface of the surface element. The ink-jet printer is controlled by a computer where the digital décor used earlier is processed to receive a digital structure matching the décor in aspects like grain direction and density, flaws, knots and border lines between simulated wood blocks. This processing may be achieved by an automatic process where an algorithm is used as a digital filter or by manual operation during the scanning procedure. By this procedure a surface structure matching all essential aspects of the décor is achieved.

A second basic layer of UV-curing acrylic lacquer is then applied by means of rollers. The lacquer will be repelled from the parts of the surface where the wetting repellent lacquer is present resulting in recesses in the surface. Particles with an average particle size in the range 75 μm is then sprinkled onto the still wet second basic layer, whereby the main layer of UV-curing acrylic lacquer with an

additive in the form of hard particles with an average size of 10 μm , is applied by means of a roller. The lacquer is then completely cured with UV-light to desired strength, whereby the finished surface element is cut into the predetermined formats which are provided with edges with joining functionality are moulded by milling. The cutting and edge moulding process is positioned from fixing point printed close to the décor. The surface elements may then be inspected by the naked eye or by a digital camera supported by a computer. The surface elements are then packed in batches and provided with identification markings.

It is, according to an alternative procedure in the process, possible to cut and mould the edges at an earlier stage in the process. It is suitable to apply and cure a protecting layer of lacquer and possibly the UV-curing acrylic wetting repellent lacquer on top of the printed décor followed by cutting and moulding of the edges. The remaining and main part of the wear layer is then applied as described in connection to process scheme 1 or 2 above.

The process above will make it possible to have a customer initiated manufacturing where even very small quantities may be produced with the same efficiency as bulk manufacturing. Even though only one décor is described in connection to the process scheme above, it becomes clear anyone skilled in the art, that décor is changed very easily in the process. All of the important steps of the manufacturing such as printing, structuring, inspection, packaging and identification marking may be controlled and supervised by central processing data.

The invention is also described through embodiment examples.

EXAMPLE 1.

A supporting core of medium density fibre board were sanded smooth. A layer of primer lacquer were applied on top of the fibre board. The primer were cured after which a decor was printed on top of the primer.

The build up of a structured wear layer was then initiated by applying 10g/m² of UV-curing acrylic lacquer by means of roller coating. The surface structuring was then initiated by printing the part of the structure that is to form recesses in the

finished surface. A UV-curing acrylic wetting repellent lacquer with a content of silicone polymer was printed by means of an ink-jet printer in the desired pattern. The pattern was made up by narrow lines of varying length and covered less than 2% of the total surface of the surface element. The wetting repellent lacquer was then exposed to a predetermined energy amount of UV-light so that it cured. 30g/m² of UV-curing acrylic lacquer by means of roller coating. The lacquer was repelled from the parts of the surface where the wetting repellent lacquer was present which resulted in recesses in the surface. 20g/m² of hard particles made of α -aluminium oxide with an average particle size of 70 μ m were sprinkled on the still sticky lacquer. The lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. Residual particles were then removed by blowing a high pressure air stream over the surface. Another 30g/m² of UV-curing acrylic lacquer was then roller coated onto the already applied layer after which another 20g/m² of α -aluminium oxide particles with an average particle size of 70 μ m were sprinkled on the still sticky second coating. The lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. Again, residual particles were then removed by blowing a high pressure air stream over the surface. Three layers of UV-curing acrylic lacquer was then applied by roller coating with intermediate partial curing as a above. Each of the three layers had a surface weight of 20g/m². The hard particles were completely embedded in the lacquer after the three layers were applied and a plane upper wear layer surface was achieved.

A top coating procedure was then initiated. A first layer of UV-curing acrylic topcoat lacquer was applied by means of a roller coater on top of the previous, partly cured, layers. The topcoat lacquer contained 10% by weight of hard particles of α -aluminium oxide with an average particle size of 10 μ m. The first layer was applied to a surface weight of 10g/m². The topcoat lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. A second and a third layer of the topcoat lacquer was then applied and partly cured as described above. All layers were then

exposed to a predetermined energy amount of UV-light so that it cured completely.

The wear layer was then tested for abrasion resistance according to ISO 4586/2-88, where an IP value of 7000 turns was obtained. An IP value of 7000 turns is fully sufficient for floor covering materials with medium to heavy traffic like hotel lobbies, hallways and the like.

EXAMPLE 2.

A supporting core of medium density fibre board were sanded smooth. A layer of primer lacquer were applied on top of the fibre board. The primer were cured after which a decor was printed on top of the primer.

The build up of a wear layer was then initiated by applying 30g/m² of UV-curing acrylic lacquer by means of roller coating. 20g/m² of hard particles made of α -aluminium oxide with an average particle size of 70 μ m were sprinkled on the still sticky lacquer. The lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. Another 30g/m² of UV-curing acrylic lacquer was then roller coated onto the already applied layer after which another 20g/m² of α -aluminium oxide particles with an average particle size of 70 μ m were sprinkled on the still sticky second coating. The lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. Three layers of UV-curing acrylic lacquer was then applied by roller coating with intermediate curing as a above. Each of the three layers had a surface weight of 20g/m². The hard particles were completely embedded in the lacquer after the three layers were applied and a plane upper wear layer surface was achieved. Also the uppermost of the three layers of lacquer was cured to a desired viscosity.

A second décor layer was then printed on top of the wear layer. The second décor layer, which was identical to the first décor closest to the core, was oriented and positioned so that it completely matched the first décor. The build up of a structured upper wear layer was then initiated by applying 10g/m² of UV-curing acrylic lacquer by means of roller coating. The surface structuring was then

initiated by printing the part of the structure that is to form recesses in the finished surface. A UV-curing acrylic wetting repellent lacquer with a content of silicone polymer was printed by means of an ink-jet printer in the desired pattern. The pattern was made up by narrow lines of varying length and covered less than 2% of the total surface of the surface element. The wetting repellent lacquer was then exposed to a predetermined energy amount of UV-light so that it cured. 30g/m² of UV-curing acrylic lacquer by means of roller coating. The lacquer was repelled from the parts of the surface where the wetting repellent lacquer was present which resulted in recesses in the surface. 20g/m² of hard particles made of α -aluminium oxide with an average particle size of 70 μ m were sprinkled on the still sticky lacquer. The lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. Residual particles were then removed by blowing a high pressure air stream over the surface. Another 30g/m² of UV-curing acrylic lacquer was then roller coated onto the already applied layer after which another 20g/m² of α -aluminium oxide particles with an average particle size of 70 μ m were sprinkled on the still sticky second coating. The lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. Again, residual particles were then removed by blowing a high pressure air stream over the surface. Three layers of UV-curing acrylic lacquer was then applied by roller coating with intermediate curing as above. Each of the three layers had a surface weight of 20g/m². The hard particles were completely embedded in the lacquer after the three layers were applied and a plane upper wear layer surface was achieved.

A top coating procedure was then initiated. A first layer of UV-curing acrylic topcoat lacquer was applied by means of a roller coater on top of the previous, partly cured, layers. The topcoat lacquer contained 10% by weight of hard particles of α -aluminium oxide with an average particle size of 10 μ m. The first layer was applied to a surface weight of 10g/m². The topcoat lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. A second and a third layer of the topcoat lacquer

was then applied and partly cured as described above. The wear layer was exposed to a predetermined energy amount of UV-light so that it cured completely.

The wear layer was then tested for abrasion resistance according to ISO 4586/2-88, where an IP value of 13200 turns was obtained. An IP value of 13200 turns is fully sufficient for floor covering materials with heavier traffic like airports, railway stations and the like. The second layer of décor and wear layer will add abrasion resistance without having obtained an unwanted hazy effect in the décor.

EXAMPLE 3.

A supporting core of medium density fibre board were sanded smooth. A layer of primer lacquer were applied on top of the fibre board. The primer were cured after which a decor was printed on top of the primer.

The build up of a structured wear layer was then initiated by applying 10g/m² of UV-curing acrylic lacquer by means of roller coating. The surface structuring was then initiated by printing the part of the structure that is to form recesses in the finished surface. A UV-curing acrylic wetting repellent lacquer with a content of silicone polymer was printed by means of an ink-jet printer in the desired pattern. The pattern was made up by narrow lines of varying length and covered less than 2% of the total surface of the surface element. The wetting repellent lacquer was then exposed to a predetermined energy amount of UV-light so that it cured. 15g/m² of UV-curing acrylic lacquer by means of roller coating. The lacquer was repelled from the parts of the surface where the wetting repellent lacquer was present which resulted in recesses in the surface. 20g/m² of hard particles made of α -aluminium oxide with an average particle size of 70 μ m were sprinkled on the still sticky lacquer. The lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. Residual particles were then removed by blowing a high pressure air stream over the surface. One layer of UV-curing acrylic lacquer was then applied by roller coating and was partially cured as above. The layer had a surface weight of

40g/m². The hard particles were embedded in the lacquer after the layer of lacquer was applied and a mainly plane upper wear layer surface was achieved.

A top coating procedure was then initiated. A first layer of UV-curing acrylic topcoat lacquer was applied by means of a roller coater on top of the previous, cured, layers. The topcoat lacquer contained 10% by weight of hard particles of α -aluminium oxide with an average particle size of 10 μ m. The first layer was applied to a surface weight of 10g/m². The topcoat lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased. A second, final layer of the topcoat formulation was then applied on top of the previous layer. Also the second layer of top coat was applied to a surface weight of 10g/m². The wear layer was then exposed to a predetermined energy amount of UV-light so that it cured completely.

The wear layer was then tested for abrasion resistance according to ISO 4586/2-88, where an IP value of 3000 turns was obtained. An IP value of 3000 turns is fully sufficient for floor covering materials with light traffic like bedrooms, living rooms and the like.

EXAMPLE 4.

A supporting core of medium density fibre board were sanded smooth. A layer of primer lacquer were applied on top of the fibre board. The primer were cured after which a decor was printed on top of the primer.

The surface structuring was then initiated by printing the part of the structure that is to form recesses in the finished surface. A UV-curing acrylic wetting repellent lacquer with a content of silicone polymer was printed by means of an ink-jet printer in the desired pattern. The pattern was made up by narrow lines of varying length and covered less than 1% of the total surface of the surface element. The wetting repellent lacquer was then exposed to a predetermined energy amount of UV-light so that it cured. 50g/m² of UV-curing acrylic lacquer which contained 10% by weight of hard particles of α -aluminium oxide with an average particle size of 10 μ m were applied by means of roller coating. The lacquer was repelled from the parts of the surface where the wetting repellent

lacquer was present which resulted in recesses in the surface. The lacquer was then exposed to a predetermined energy amount of UV-light so that it cured only partly and the viscosity was increased.

A top coating procedure was then initiated. A first layer of UV-curing acrylic topcoat lacquer was applied by means of a roller coater on top of the previous, partly cured, layer. The topcoat lacquer contained 10% by weight of hard particles of α -aluminium oxide with an average particle size of $10\mu\text{m}$. The first layer was applied to a surface weight of $10\text{g}/\text{m}^2$. The topcoat lacquer was then exposed to a predetermined energy amount of UV-light so that it cured completely.

The wear layer was then tested for abrasion resistance according to ISO 4586/2-88, where an IP value of 280 turns was obtained. An IP value of 280 turns could be sufficient for floor covering materials with light traffic like bedrooms, living rooms and the like.

The invention is not limited to the embodiments shown as these can be varied in different ways within the scope of the invention. It is for example possible to plane the surface by pressing one or more glazing rollers towards the surface structured wear layer before or after the complete curing stage. The glazing rollers are preferably also heated to a surface temperature above 30°C , preferably in the range $35^\circ\text{C} - 100^\circ\text{C}$.

The hard particles added to the lacquer consists of for example silicon oxide, α -aluminium oxide or silicon carbide. According to one embodiment of the invention the main part of the hard particles consists of for example silicon oxide, α -aluminium oxide or silicon carbide while a smaller amount of the hard particles consist of diamond. The hard particles consisting of diamond is then in the average particle size range $50\text{nm} - 2\mu\text{m}$ and is placed close to the upper surface of the wear layer.

CLAIMS

1. A process for the manufacturing of a decorative surface element, which element comprises a base layer and a decorative upper surface, characterised in that,
 - i) a wetting repellent lacquer is printed in a predetermined pattern on the decorative upper surface, the wetting repellent lacquer covering only parts of the decorative upper surface whereupon,
 - ii) a wear layer of a UV or electron beam curing lacquer is applied on top of the decorative upper surface which UV or electron beam curing lacquer is repelled from the parts of the surface being covered by the wetting repellent lacquer whereby a surface structure is achieved.
2. A process according to claim 1, characterised in that the UV or electron beam curing lacquer consists of an acrylic, epoxy or a maleimide lacquer.
3. A process according to claim 1 or 2, characterised in that the wear layer is applied in several steps with intermediate partial curing.
4. A process according to any of the claims 1 - 3, characterised in that the wear layer includes hard particles with an average particle size in the range 50nm - 150µm.
5. A process according to claim 4, characterised in that the hard particles consists of for example silicon oxide, α -aluminium oxide or silicon carbide.
6. A process according to claim 4, characterised in that the main part of the hard particles consists of for example silicon oxide, α -aluminium oxide or silicon carbide while a smaller amount of the hard particles consist of diamond.
7. A process according to claim 6, characterised in that the hard particles consisting of diamond is in the average particle size range 50nm - 2µm and is placed close to the upper surface of the wear layer.

8. A process according to claim 1, characterised in that the wetting repellent lacquer is constituted of a UV or electron beam curing lacquer with a content of silicone polymer.
9. A process according to claim 8, characterised in that the wetting repellent lacquer comprises UV or electron beam curing acrylic, epoxy or a maleimide lacquer.
10. A process according to claim 8 or 9, characterised in that the wetting repellent lacquer is translucent.
11. A process according to claim 8 or 9, characterised in that the wetting repellent lacquer is semi-translucent.
12. A process according to claim 11, characterised in that the wetting repellent lacquer includes pigmentation which creates a structure enhancing shadow effect in the structure.
13. A process according to claim 11, characterised in that the wetting repellent lacquer includes a matting agent which creates a structure enhancing effect in the structure.
14. A process according to claim 8 or 9, characterised in that the wetting repellent lacquer is cured before the step where the wear layer is applied.
15. A process according to claim 1, characterised in that the decorative upper surface comprises a decor layer, which decor layer originates from a digitally stored original, that the digitally stored original is processed in order to achieve a digital structure original whereby a surface structure that in every essential aspect matches the decor is achieved.
16. A process according to claim 8 or 11, characterised in that the wetting repellent lacquer is applied by means of an ink-jet printer.
17. A process according to claim 1, characterised in that the base layer consists of a particle board or a fibre board.

18. A process according to claim 1, c h a r a c t e r i s e d in that the base layer consists mainly of a polymer such as polyurethane.

Fig.

